

DIAPHRAGM VALVE

# Diaphragm Valve

MODEL **VDVD-10-16** REF **EFC-148** ISSUED **05 Jun 2026**

## SPECIFICATIONS

Size	<b>DN15–DN500</b>
Pressure	<b>PN10–PN40</b>
End connection	<b>flanged (DIN 2501) / flanged (TS 810) / flanged (BS 4504) / flanged (ASA 125) / flanged (ASA 150)</b>
Face-to-face	<b>DIN3202/2-F1, BS 5156</b>

## ACTUATION

- manual handwheel — GG 25 / St handwheel




## MATERIALS

body	<b>grey cast iron, ductile iron, cast steel</b>	bonnet	<b>grey cast iron, ductile iron, cast steel</b>
bushing	<b>brass, bronze</b>	stem	<b>stainless steel</b>
handwheel	<b>grey cast iron, steel</b>		

DIAPHRAGM VALVE

# Diaphragm Valve

SECTION Technical drawing REF EFC-148

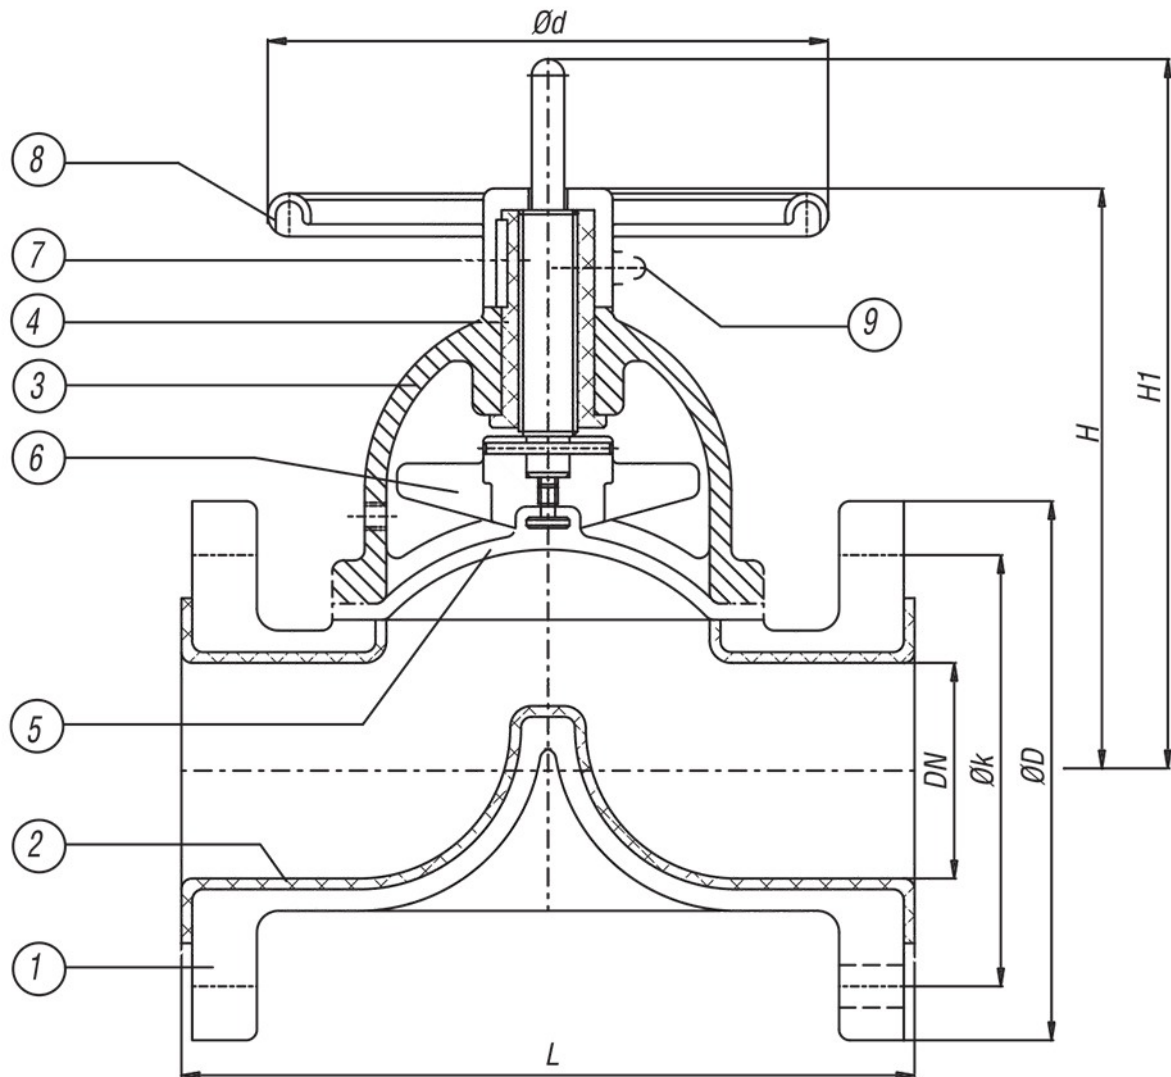

DIAPHRAGM VALVE

# Diaphragm Valve

SECTION Dimensions per size REF EFC-148

SIZE	L	H	H1	OD	WEIGHT
DN15	130	75	75	80	2.5 kg
DN20	150	100	100	80	3 kg
DN25	160	110	110	80	3 kg
DN32	180	125	150	80	6.5 kg
DN40	200	145	170	100	7 kg
DN50	230	175	205	120	9 kg
DN65	290	195	235	140	14 kg
DN80	310	235	280	160	18 kg
DN100	350	265	330	200	26 kg
DN125	400	320	400	250	50 kg
DN150	480	375	460	280	66 kg
DN200	600	530	645	320	130 kg
DN250	730	630	775	360	190 kg
DN300	730	730	930	400	295 kg

All dimensions in millimetres unless stated otherwise. Values are nominal; tolerances confirmed at quote.