

CHECK VALVE

# Wafer Dual Plate Check Valve


REF **EFC-92** ISSUED 05 Jun 2026

## SPECIFICATIONS

Size	<b>DN40–DN800</b>
Pressure	<b>PN10–PN25</b>
End connection	<b>wafer (EN 1092)</b>
Face-to-face	<b>EN 558 Serie 16, DIN 3202-K3</b>

## STANDARDS

Test	<b>EN 12266-A</b>
------	-------------------

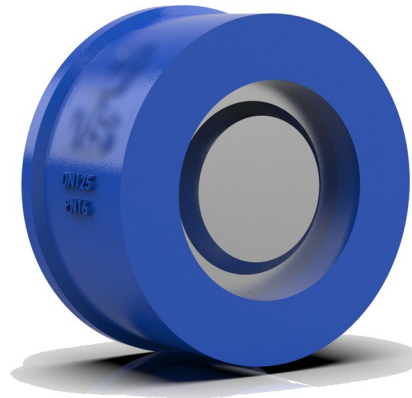

## MATERIALS

body	<b>grey cast iron, ductile iron, carbon steel, stainless steel, bronze</b>	seat	<b>PTFE, elastomer, stainless steel, cobalt alloy</b>
disc	<b>stainless steel, bronze, ductile iron</b>	shaft	<b>stainless steel</b>
spring	<b>stainless steel</b>		

CHECK VALVE

# Wafer Dual Plate Check Valve

SECTION Dimensions per size REF EFC-92

SIZE	OA	R	L	OD_PN10	OD_PN16	OD_PN25	WEIGHT
DN40	null	null	33	94	94	94	1 kg
DN50	58	33	43	109	109	109	1 kg
DN65	null	null	46	129	129	129	2 kg
DN80	70	41	64	144	144	144	3 kg
DN100	95	52	64	164	164	164	5 kg
DN125	128	70	70	194	194	194	6 kg
DN150	132	70	76	220	220	220	8 kg
DN200	192	104	89	275	275	284	15 kg
DN250	244	126	114	330	330	343	27 kg
DN300	295	153	114	380	386	403	34 kg
DN350	320	168	127	440	446	460	53 kg
DN400	380	195	140	491	498	515	70 kg
DN450	420	217	152	541	558	565	100 kg
DN500	480	247	152	596	620	625	130 kg
DN600	585	299	178	698	735	732	180 kg
DN700	690	352	229	808	808	834	260 kg
DN800	780	395	241	915	915	942	340 kg

All dimensions in millimetres unless stated otherwise. Values are nominal; tolerances confirmed at quote.